



DAE Pumps

Designed And Engineered Pumping Solutions

VISIT SITE NOW >>

Gulfport D640S

Submersible Drainage Pump



DAEPUMPS.COM

info@daepumps.com


(760) 821-8112

[VISIT SITE NOW >>](#)

PRODUCT REFERENCE SHEET

The **Gulfport D640S Submersible Drainage Pump** handle either clean or sand-laden water, even with small solid particles, with the best performance and efficiency. These pumps are designed with robustness, sustained performance and ease-of-maintenance in mind. Suitable for general dewatering applications, ground water, raw water, construction sites and harsh conditions on site.

Product code	Gulfport D640S
Installation	Portable drainage pump
Hydraulic range	N - normal head
Insulation class	H (+180 °C / +356 °F) IEC 85 (VFD-ready)
Protection class	IP 68
Voltage variation	Max ± 5% of nominal voltage
Voltage imbalance	Max 2% - between phases
Max start-stop	Max 30 starts/hour
Cable	H07RN-F (20 m) / SOOW AWG (65 ft)
Casted parts	Corrosion resistant aluminum
Impeller	High chrome iron, 55±5 HRC
Wear parts	Rubber (NBR)
Strainer	Corrosion resistant aluminum
Shaft	Stainless steel
O-rings	Rubber (NBR)
Main bearing	Double row ball bearing in oil
Mechanical seal	Primary + secondary: SiC/SiC
Built-in controls and protection	Contactors + control relay
Thermal contacts	140 °C / 284 °F
Options / accessories	Float switch Zinc anodes Epoxy coating Quick couplings (hose / NPT / ISO-G / Camlock / Storz) Pump raft Terminal board Softstarter NSSHÖ screened cable Slim adapter

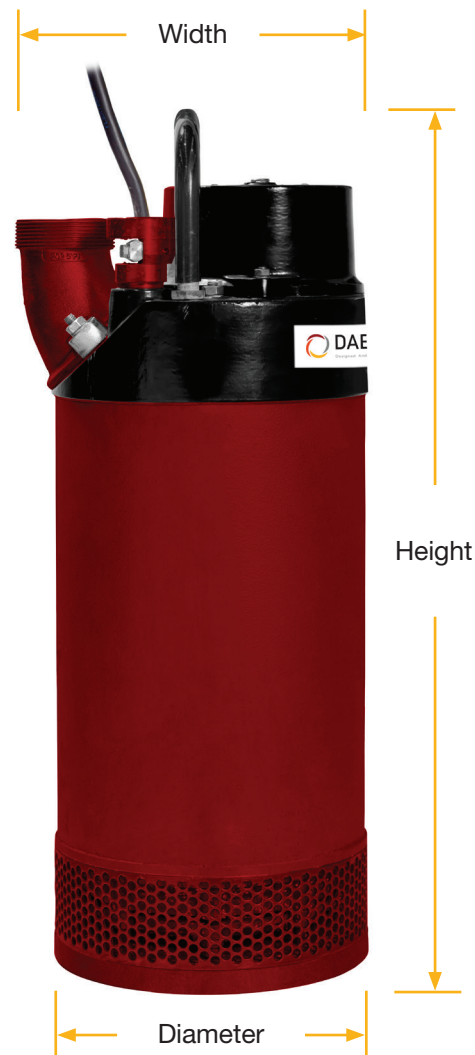

Rating	3 pH	Std cable
Power P ₁	9.9 kW	
Power P ₂	11.5 Hp	
Shaft speed	3500 rpm	
230 V	29 A	AWG 8
460 V	14.1 A	AWG 10
575 V	11.2 A	AWG 12

Other voltages on request


[VISIT SITE NOW >>](#)

VISIT SITE NOW >>


Product code	Gulfport D640S
Solids handling, strainer hole	0.31 in
Liquid temperature	Max 104 °F
Depth of immersion	Max 65 ft
Max liquid specific gravity	1.1
pH of the pumped liquid	5 pH – 8 pH

Weight and dimensions	N - Normal head
Discharge connection	4 in
Height	29.9 in
Width	13 in
Diameter	10.9 in
Weight (excl. cable)	136 lb

 **PERFORMANCE CURVE**

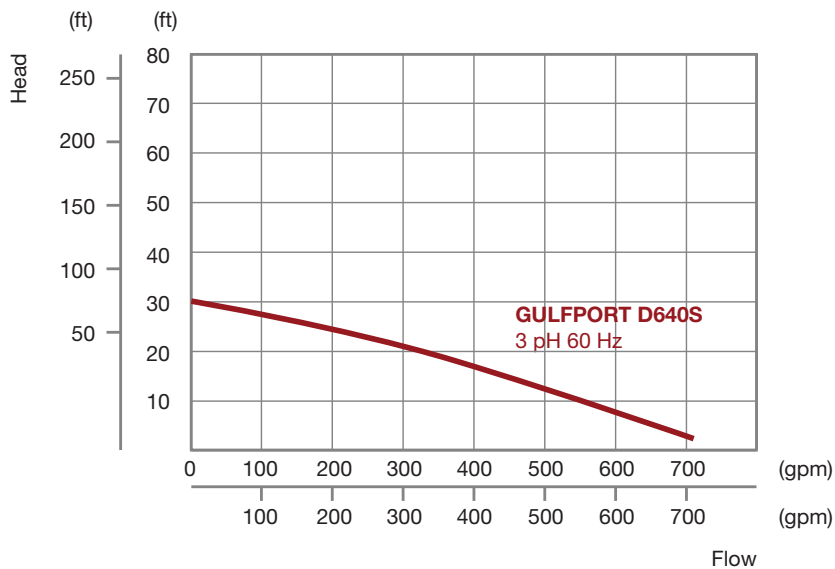

 **POWER RATING**

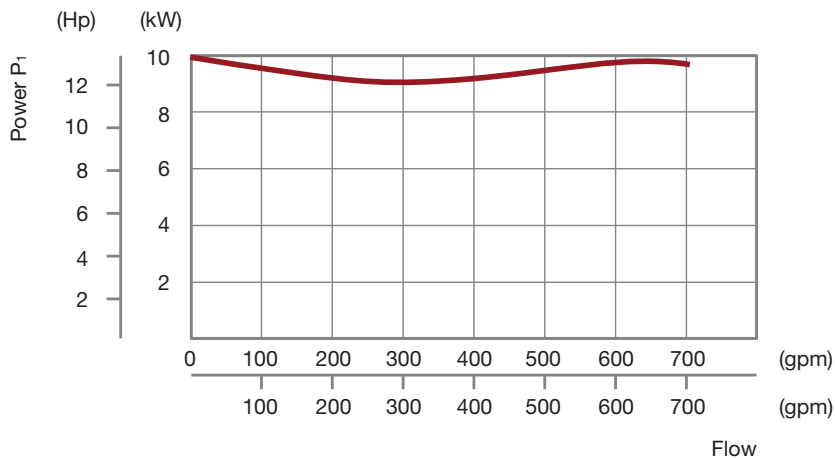

VISIT SITE NOW >>