

DESIGNED AND ENGINEERED PUMPING SOLUTIONS



DAE Pumps

Designed And Engineered Pumping Solutions

VISIT SITE NOW >>

Gulfport D740H

Submersible Drainage Pump



DAEPUMPS.COM

info@daepumps.com


(760) 821-8112

[VISIT SITE NOW >>](#)

PRODUCT REFERENCE SHEET

The **Gulfport D740H Submersible Drainage Pump** handle either clean or sand-laden water, even with small solid particles, with the best performance and efficiency. These pumps are designed with robustness, sustained performance and ease-of-maintenance in mind. Suitable for general dewatering applications, ground water, raw water, construction sites and harsh conditions on site.

Product code	Gulfport D740H
Installation	Portable drainage pump
Hydraulic range	H - high head
Insulation class	H (+180 °C / +356 °F) IEC 85 (VFD-ready)
Protection class	IP 68
Voltage variation	Max ± 5% of nominal voltage
Voltage imbalance	Max 2% - between phases
Max start-stop	Max 30 starts/hour
Cable	H07RN-F (20 m) / SOOW AWG (65 ft)
Casted parts	Corrosion resistant aluminum
Impeller	High chrome iron, 55±5 HRC
Wear parts	Rubber (NBR)
Diffuser	Polyurethane
Strainer	Corrosion resistant aluminum
Shaft	Stainless steel
O-rings	Rubber (NBR)
Main bearing	Double row ball bearing, pregreased
Mechanical seal	Cartridge-type, primary + secondary: SiC/SiC
Built-in controls and protection	Contactors + control relay + overload relay
Thermal contacts	140 °C / 284 °F
Options / accessories	Float switch Zinc anodes Epoxy coating Quick couplings (hose / NPT / ISO-G / Camlock / Storz) Pump raft Terminal board Softstarter NSSHÖU screened cable Slim adapter D70H

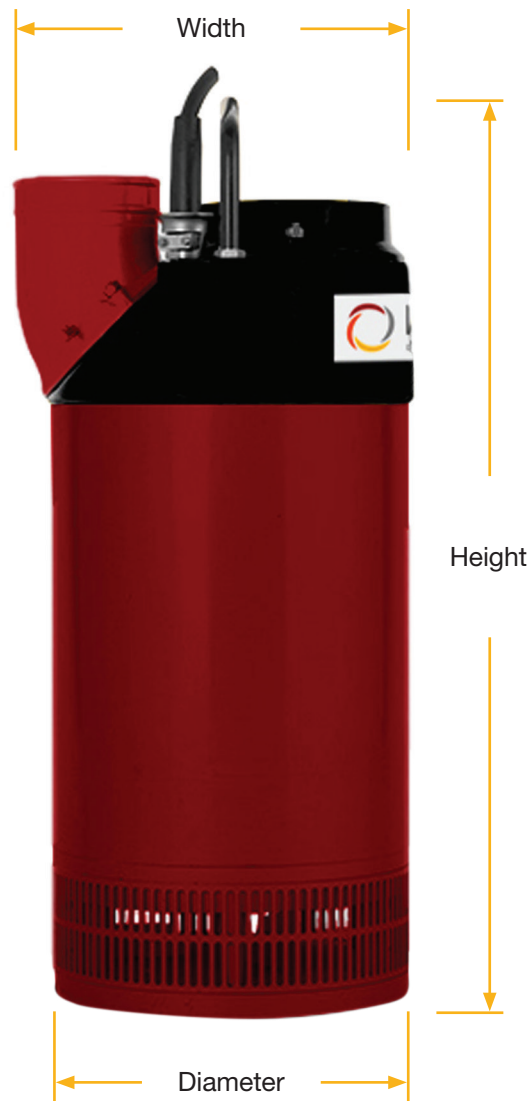

Rating	3 pH	Std cable
Power P ₁	15 kW	
Power P ₂	18 Hp	
Shaft speed	3500 rpm	
460 V	24 A	AWG 8
575 V	18.2 A	AWG 10

Other voltages on request

[VISIT SITE NOW >>](#)




VISIT SITE NOW >>


Product code	Gulfport D740H
Solids handling, strainer hole	0.39 in
Liquid temperature	Max 104 °F
Depth of immersion	Max 65 ft
Max liquid specific gravity	1.1
pH of the pumped liquid	5 pH – 8 pH

Weight and dimensions	H - High head
Discharge connection	4 in
Height	37.1 in
Width	15.5 in
Diameter	14.6 in
Weight (excl. cable)	244 lb

PERFORMANCE CURVE

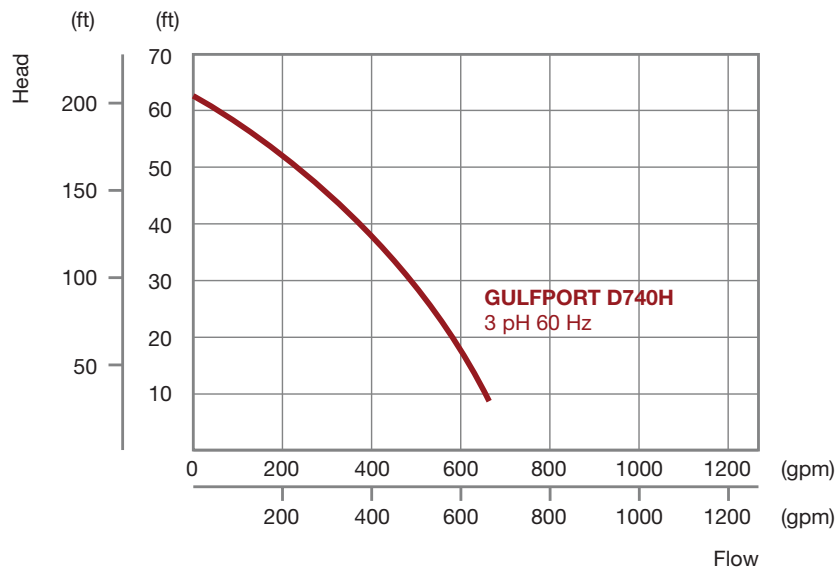

POWER RATING

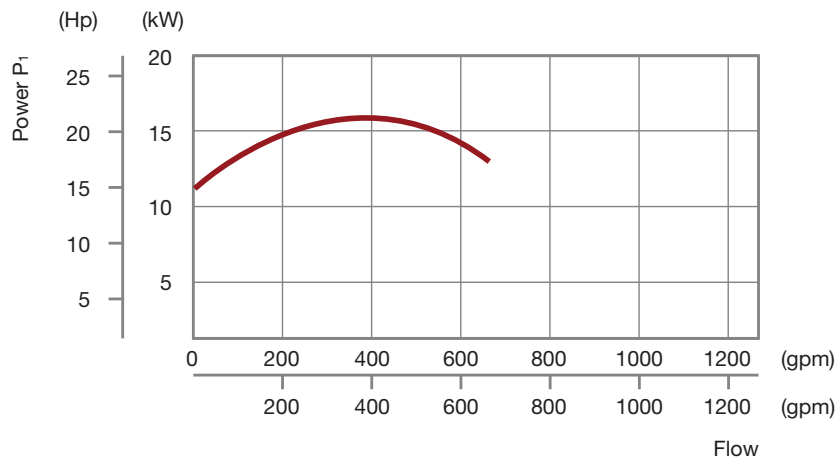

VISIT SITE NOW >>

