


# GALA 350

## Rotary Lobe Pumps

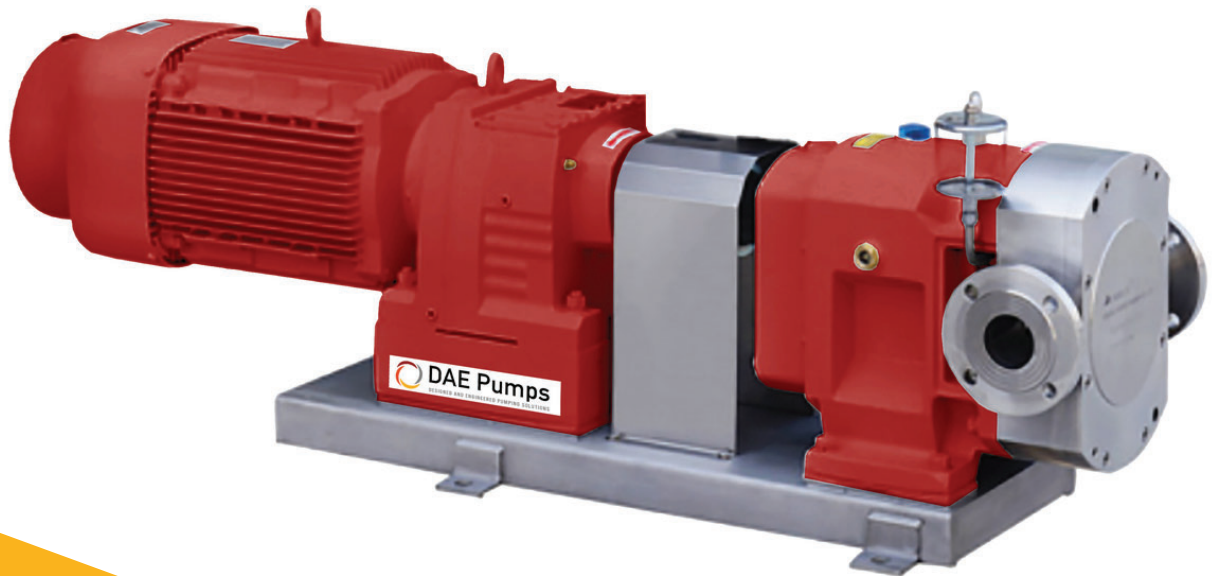


**DAEPUMPS.COM**

info@daepumps.com

(760) 821-8112

# Gala 350 Rotary Lobe Pumps

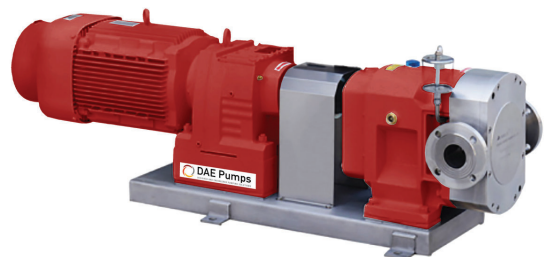

SPECIFICATIONS	US	Metric
<b>Rated Capacity:</b>	0-204 gpm	0-46 m <sup>3</sup> /h
<b>Displacement (per 100 revolutions):</b>	34 gal (US)	129 L
<b>Maximum Continuous Pressure:</b>	145 psi	10 bar
<b>Starting Torque:</b>	1,121 in lbf	82 N m
<b>Rated Speed:</b>	0-600 RPM	0-600 RPM
<b>Shaft Diameter:</b>	1.65"	42 mm
<b>Flange Connection Class:</b>	ANSI 16.5-150#	DN – PN 16
<b>Flange Connection Size:</b>	ANSI 3"	DN 80
<b>Weight:</b>	257 lbs	117 kg
<b>Solids Handling:</b>		
<b>Spherical Compressible</b>	1.5"	38 mm
<b>Spherical Hard*</b>	1/8"	3 mm


*\* Larger hard solids will pass through but may cause damage.*

MODEL: SERVICE	Gala 350-S Sludge, Mud and Slurries*	Gala 350-C Chemical/Corrosive	Gala 350-X Oil, Gas & Abrasives
<b>WETTED PARTS</b>			
<b>Rotary Lobes</b>			
Elastomer	NBR Opt. HNBR, FKM, EPDM or Eng. Rec.	FKM or HNBR Opt. NBR, EPDM or Eng. Rec.	FKM or HNBR Opt. NBR, EPDM or Eng. Rec.
Lobe Profile	Helix	Helix	Helix
Number of lobe wings	4	4	4
Core	Carbon Steel	Carbon Steel	Carbon Steel
<b>Sealing Elastomers</b>			
O-rings	FKM	FKM or Engineer Recommendation	FKM or Engineer Recommendation
Lip seals	FKM or Engineer Recommendation	FKM or Engineer Recommendation	FKM or Engineer Recommendation
<b>Mechanical Seals</b>			
Mechanical Seal	Duronit Opt. Tungsten Carbide, Silicon Carbide or Eng.Rec.	Silicon Carbide Opt. Tungsten Carbide or Engineer Rec.	Tungsten Carbide Opt. Tungsten Carbide or Engineer Rec.
Seal Holders	Carbon Steel with Corrosion resistant coating	Stainless Steel Type 316	Duplex Stainless Steel
<b>Wear Plates</b>	AR500 Steel (Brinell 500)	Duplex Stainless Steel	Duplex Stainless Steel
<b>Housing Segments</b>	ASTM A48 Grey Iron rust primed	Duplex Stainless Steel	Duplex Stainless Steel
<b>Flange Ring</b>	ASTM A36 Carbon Steel	Stainless Steel Type 316L	Duplex Stainless Steel
<b>Bolts</b>	Carbon Steel ISO 898-1	Stainless Steel A2-A4	Duplex Stainless Steel
<b>Pressure Disc</b>	Stainless Steel Type 316L	Stainless Steel Type 316L	Duplex Stainless Steel
<b>LIMITED EXPOSURE PARTS</b>			
<b>Quench/Seal Cooling Chamber</b>	ASTM A48 Grey Iron rust primed	ASTM A48 Grey Iron with PTFE / Ceramic Teflon etched on face	ASTM A48 Grey Iron with PTFE / Ceramic Teflon etched on face
<b>Pump Cover</b>	ASTM A48 Grey Iron rust primed	CIT coated Grey Iron Opt. 316 Stainless Steel	CIT coated Grey Iron Opt. Duplex Stainless Steel
<b>NON-WETTED PARTS</b>			
<b>Gears</b>	GMA Class 9 AISI 1045 steel	GMA Class 9 AISI 1045 steel	GMA Class 9 AISI 1045 steel
<b>Gear Housing</b>	ASTM A48 Grey Iron rust primed	ASTM A48 Grey Iron rust primed	ASTM A48 Grey Iron rust primed
<b>Shaft</b>	AISI 4140 Alloy Steel	AISI 4140 Alloy Steel	AISI 4140 Alloy Steel
<b>PAINTING REQUIREMENTS</b>			
<b>Standard Painting</b>	SSPC/SP6 Sandblast Paint	SSPC/SP6 Sandblast Paint	SSPC/SP6 Sandblast Paint
<p><b>NOTE:</b> Listed above are standard pump assemblies; lobe styles and materials subject to recommendation by DAE Pumps. A wide range of optional materials are available for each model. Consult <a href="http://DAEPumps.com">DAEPumps.com</a> for further information. *Consult Factory for application temperature above 80°C (175°F).</p>			

# Gala 350 | Rotary Lobe Pumps

## Performance Curve - NBR Lobes\*

Based on 70°F (21°C) fresh water (1 cp) at Sea Level.  
Output will increase as viscosity of the fluid increases from 1.

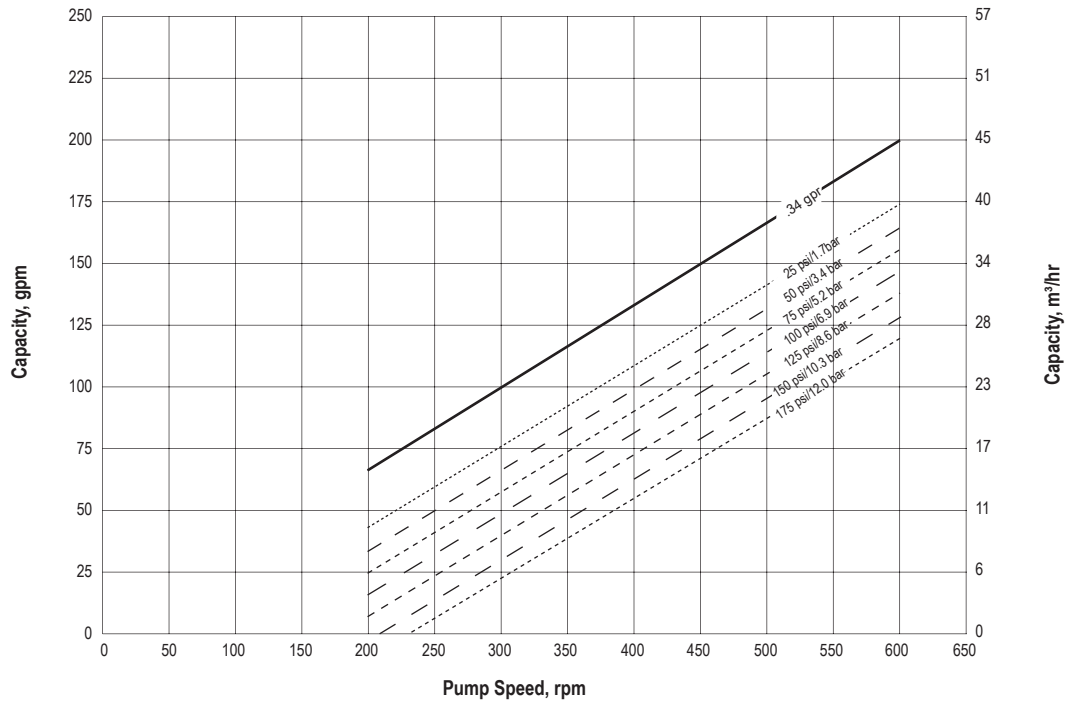

\*Note: Output from lobes coated with elastomers other than NBR maybe lower. Contact Engineering for further information.

## Horsepower Requirements

