DAE Pumps

DESIGNED AND ENGINEERED PUMPING SOLUTIONS

Growler 3000

6” Electric Dredge Pump

with 2 Side Agitators

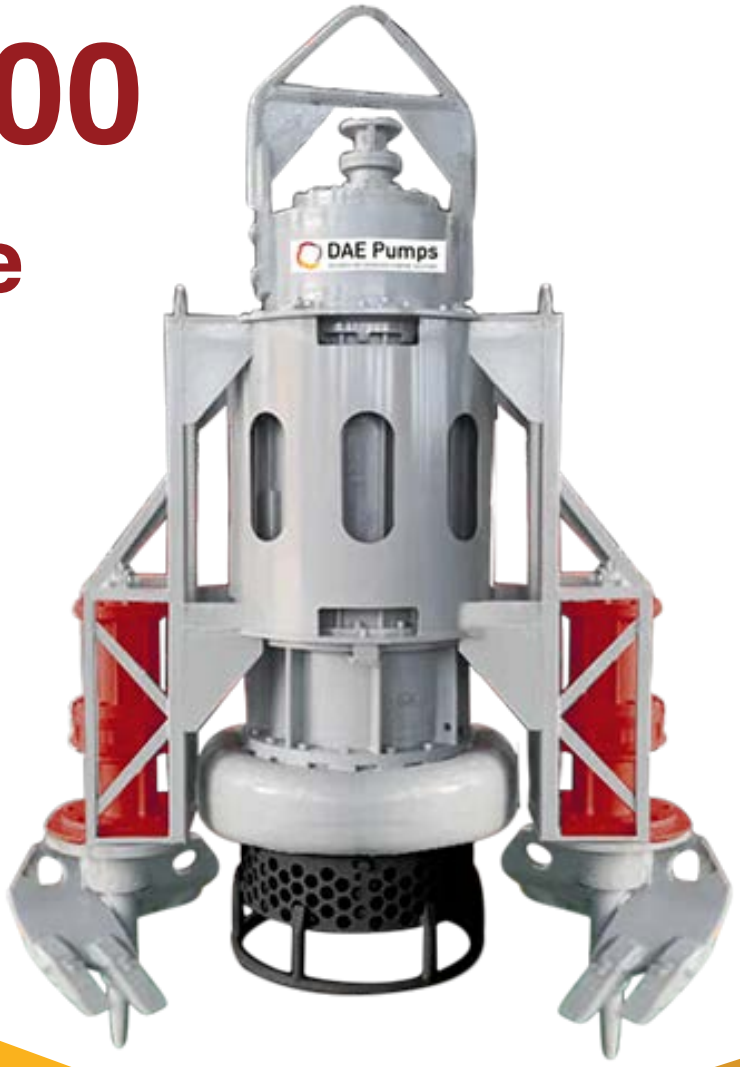

DAEPUMPS.COM

info@daepumps.com

(760) 821-8112

Growler 3000

6” Electric Dredge Pump with 2 Side Agitators

The DAE Pumps Growler 3000 Electric Dredge Pump with 2 Side Agitators is a highly durable and reliable dredge pump for transporting solids and a variety of other materials.

Built with two heavy-duty excavator-grade agitators. The industry’s top dredge pump is capable of moving up to 15-95 cubic yards of solids per hour between 250 to 1320 GPM. The DAE Pumps Growler 3000 provides non-clogging suction power to excavate and pump some of the most challenging dredging situations.

The suction power of the mighty pump can handle solids up to 1.75-inches moving up to 30% of solids through a 6-inch discharge.

- 6-inch Pump
- 250 - 1320 GPM
- 2 Side Agitators
- Solids Handling up to 1.75 in.
- Pumps up to 30% Solids
- Highly Durable Abrasion Resistant
- Over 200 Ft. Head
- Interchangeable Hard Tooth Cutter Heads
- Robust Motor for Strong Torque

6” Growler 3000

Pump Models

Model	GPM	Head (Ft)	HP	Yards³ / Hour
Growler 3000-6-321-124-40	250 321 382	132 124 116	40	18 23 28
Growler 3000-6-440-97-30	308 440 528	106 97 87	30	22 32 39
Growler 3000-6-440-113-40	308 440 528	122 113 103	40	22 32 39
Growler 3000-6-440-161-50	308 440 528	171 161 151	50	22 32 39
Growler 3000-6-440-193-60	308 440 528	206 193 177	60	22 32 39
Growler 3000-6-660-58-22	462 660 792	64 58 48	22	34 49 58
Growler 3000-6-660-71-30	462 660 792	80 71 64	30	34 49 58
Growler 3000-6-660-97-40	462 660 792	106 97 87	40	34 49 58
Growler 3000-6-660-113-60	462 660 792	122 113 103	60	34 49 58
Growler 3000-6-880-35-22	616 880 1056	40 35 28	22	45 65 78
Growler 3000-6-880-48-30	616 880 1056	55 48 43	30	45 65 78
Growler 3000-6-880-80-40	616 880 1056	87 80 71	40	45 65 78
Growler 3000-6-880-97-60	616 880 1056	106 97 87	60	45 65 78
Growler 3000-6-880-145-100	616 880 1056	154 145 135	100	45 65 78
Growler 3000-6-880-161-100	616 880 1056	171 161 151	100	45 65 78
Growler 3000-6-880-193-125	616 880 1056	206 193 177	125	45 65 78
Growler 3000-6-1100-64-40	770 1100 1320	73 64 57	40	57 81 98
Growler 3000-6-1100-113-75	770 1100 1320	122 113 103	75	57 81 98

Pump Curve

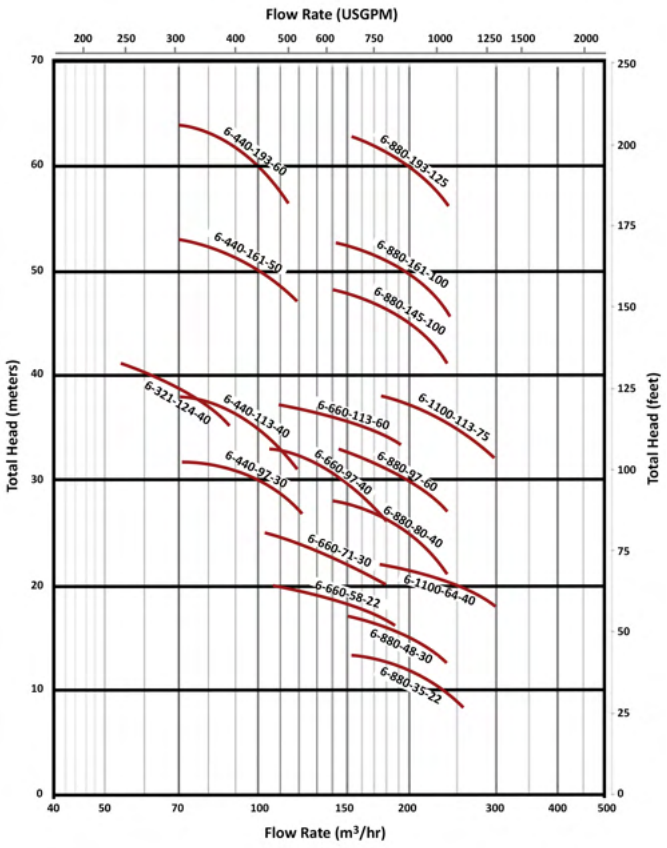

Side Agitators

Available in Multiple Powers Options

5 HP / 7.5 HP
10 HP / 15 HP / 20 HP

Cable Deployed Dredge Pump

Excavator Mounted Dredge Pump

Electric Slurry Pumps

Durable Electric slurry pumps. Versatile and rugged solution for the transfer of abrasive and high density slurries in mining, civil construction, industry and other heavy duty applications.

VERSATILE HEAVY DUTY SOLUTION

Growler 3000 series are a heavy duty, Electric submersible slurry pumps designed to handle a wide range of slurries and abrasive particles in submersible applications in mining and industry.

Growler pumps feature a rugged construction using the highest quality materials to ensure reliable performance and excellent service life. The high quality Electric motors incorporate multiple protection features to detect the ingress of water or excessive temperatures to shut off the pump and prevent damage.

LARGE CUT WATER CLEARANCE

The pump casing features a large cut water clearance which allows the easy passage of large solids and reduces wear and erosion to improve service life and prevent loss of efficiency.

INTEGRAL AGITATOR

The 27% chrome white iron agitator assists in the pumping of slurries by breaking up large particles and

agitating high concentrations of solids.

HEAVY DUTY CONSTRUCTION

The pump casing, impeller, backplate and agitator are manufactured from high quality 27% chrome white iron. This extremely tough construction material can withstand continuous use in heavy duty applications and allows the pump to transfer abrasive and dense slurries with minimal wear. The pumps feature a replaceable backplate allowing for simple servicing and easy replacement of worn components.

MOTOR INSULATION

Motor insulation is used to ensure reliable operation in heavy duty applications in temperatures up to +70°C.

SUPPORT FRAME AND STRAINER

A heavy duty mild steel frame with round base and strainer provide excellent stability and durability whilst preventing blockages.

DOUBLE MECHANICAL SEAL

A double mechanical seal provides excellent shaft sealing between the electric motor and wet end. The seals are oil bath lubricated and feature carbon/ceramic seal faces in the wet end and tungsten ceramic faces in the drive end to provide excellent durability and service life across a wide range of duties and applications.

OIL CHAMBER LEAKAGE PROBE

The oil chamber incorporates a water leakage probe which detects when the water-to-oil ratio is too high and automatically shuts down the motor to prevent damage.

MOTOR FLOAT SWITCH

A float switch is located in the bottom of the motor to detect the ingress of water and shut down the motor to prevent damage due to shorting out.

MOTOR TEMPERATURE SENSORS

Temperature sensors are located in the motor stator to detect excessive temperatures and can shut down the motor to prevent damage due to overheating.

THRUST BEARING SENSORS

Temperature and moisture sensors are located in the motor thrust bearings to detect excessive temperatures and the ingress of water and shut down the motor to prevent bearing failure.

OPTIONAL EXTERNAL COOLING

Cooling jackets can be provided with external water supply in high temperature applications to keep motor temperature down and prevent excessive stator and bearing damage.