

Growler 3000

8" Electric Dredge Pump

with 2 Side Agitators



DAEPUMPS.COM

info@daepumps.com

(760) 821-8112



Growler 3000

8" Electric Dredge Pump with 2 Side Agitators

The DAE Pumps Growler 3000 Electric Dredge Pump with 2 Side Agitators is a highly durable and reliable dredge pump for transporting solids and a variety of other materials.

Built with two heavy-duty excavator-grade agitators. The industry's top dredge pump is capable of moving up to 78-254 cubic yards of solids per hour between 1056 to 3432 GPM. The DAE Pumps Growler 3000 provides non-clogging suction power to excavate and pump some of the most challenging dredging situations.

The suction power of the mighty pump can handle solids up to 1.75-inches moving up to 30% of solids through a 8-inch discharge.



8-inch Pump



1056 - 3432 GPM



2 Side Agitators



Solids Handling up to 1.75 in



Pumps up to 30% Solids



Highly Durable Abrasion Resistant



Over 185 Ft Head



Interchangeable Hard Tooth Cutter Heads




Robust Motor for Strong Torque

8" Growler 3000

Pump Models

Model	GPM	Head (Ft)	HP	Yards ³ / Hour
Growler 3000-8-1320-32-30	1056	36		78
	1320	32	30	98
	1584	28		117
Growler 3000-8-1320-48-40	1056	55		78
	1320	48	40	98
	1584	42		117
Growler 3000-8-1320-64-50	1056	74		80
	1320	64	50	98
	1584	58		117
Growler 3000-8-1541-113-100	1078	122		80
	1540	113	100	114
	1848	103		137
Growler 3000-8-1760-48-50	1232	55		91
	1760	48	50	130
	2112	42		156
Growler 3000-8-1760-80-100	1232	87		91
	1760	80	100	130
	2112	71		156
Growler 3000-8-1760-129-120	1232	132		91
	1760	129	120	130
	2112	126		156
Growler 3000-8-1760-161-150	1232	171		91
	1760	161	150	130
	2112	151		156
Growler 3000-8-1760-193-175	1232	206		91
	1760	193	175	130
	2112	177		156
Growler 3000-8-2200-64-100	1540	73		114
	2200	64	100	163
	2640	57		196
Growler 3000-8-2200-80-120	1540	87		114
	2200	80	120	163
	2640	71		196
Growler 3000-8-2200-145-175	1540	154		114
	2200	145	175	163
	2640	135		196
Growler 3000-8-2200-177-175	1540	190		114
	2200	177	175	163
	2640	167		196
Growler 3000-8-2640-97-150	1848	106		137
	2640	97	150	196
	3168	87		235
Growler 3000-8-2860-167-215	2002	180		148
	2860	167	215	212
	3432	142		254

Pump Curve

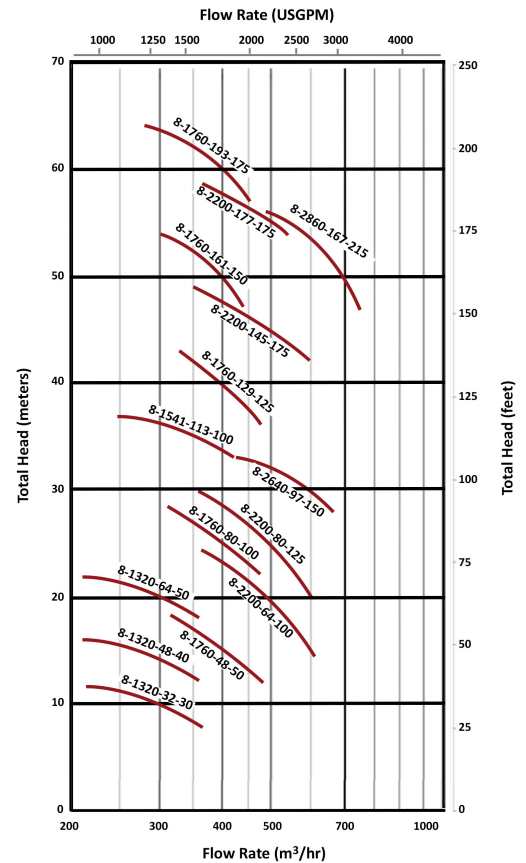

Side Agitators

Available in Multiple Powers Options

5 HP / 7.5 HP

10 HP / 15 HP / 20 HP

Cable Deployed Dredge Pump



Excavator Mounted Dredge Pump



Electric Slurry Pumps

Durable Electric slurry pumps. Versatile and rugged solution for the transfer of abrasive and high density slurries in mining, civil construction, industry and other heavy duty applications.

VERSATILE HEAVY DUTY SOLUTION

Growler 3000 series are a heavy duty, Electric submersible slurry pumps designed to handle a wide range of slurries and abrasive particles in submersible applications in mining and industry.

Growler pumps feature a rugged construction using the highest quality materials to ensure reliable performance and excellent service life. The high quality Electric motors incorporate multiple protection features to detect the ingress of water or excessive temperatures to shut off the pump and prevent damage.

LARGE CUT WATER CLEARANCE

The pump casing features a large cut water clearance which allows the easy passage of large solids and reduces wear and erosion to improve service life and prevent loss of efficiency.

INTEGRAL AGITATOR

The 27% chrome white iron agitator assists in the pumping of slurries by breaking up large particles and agitating high concentrations of solids.

HEAVY DUTY CONSTRUCTION

The pump casing, impeller, backplate and agitator are manufactured from high quality 27% chrome white iron. This extremely tough construction material can withstand continuous use in heavy duty applications and allows the pump to transfer abrasive and dense slurries with minimal wear. The pumps feature a replaceable backplate allowing for simple servicing and easy replacement of worn components.

MOTOR INSULATION

Motor insulation is used to ensure reliable operation in heavy duty applications in temperatures up to +70°C.

SUPPORT FRAME AND STRAINER

A heavy duty mild steel frame with round base and strainer provide excellent stability and durability whilst preventing blockages.



DOUBLE MECHANICAL SEAL

A double mechanical seal provides excellent shaft sealing between the electric motor and wet end. The seals are oil bath lubricated and feature carbon/ceramic seal faces in the wet end and tungsten ceramic faces in the drive end to provide excellent durability and service life across a wide range of duties and applications.

OIL CHAMBER LEAKAGE PROBE

The oil chamber incorporates a water leakage probe which detects when the water-to-oil ratio is too high and automatically shuts down the motor to prevent damage.

MOTOR FLOAT SWITCH

A float switch is located in the bottom of the motor to detect the ingress of water and shut down the motor to prevent damage due to shorting out.

MOTOR TEMPERATURE SENSORS

Temperature sensors are located in the motor stator to detect excessive temperatures and can shut down the motor to prevent damage due to overheating.

THRUST BEARING SENSORS

Temperature and moisture sensors are located in the motor thrust bearings to detect excessive temperatures and the ingress of water and shut down the motor to prevent bearing failure.

OPTIONAL EXTERNAL COOLING

Cooling jackets can be provided with external water supply in high temperature applications to keep motor temperature down and prevent excessive stator and bearing damage.