



# DAE Pumps

Designed And Engineered Pumping Solutions

**VISIT SITE NOW >>**

## Clifton 8220

Electric Submersible Pump



**DAEPUMPS.COM**

info@daepumps.com

(760) 821-8112

[VISIT SITE NOW >>](#)

## CLIFTON 8220

### 30HP / 22KW

### Electric Submersible Pumps



The DAE Pumps Clifton 8220 dewatering pump is designed for professionals demanding dewatering tasks in mining, construction, and industrial environments. The Clifton 8220 is a durable and reliable pump that can handle even the most challenging dewatering tasks. With a powerful motor and sturdy construction, the Clifton 8220 is built to last. The compact design of this portable dewatering pump is slim and features our ACrS technology. They are cost-effective solutions. Our company is the best resource for making your profits real.

Clifton pumps are designed for long-term operation, high performance, and simple maintenance. They have been proven reliable and durable in demanding applications such as construction, mining, and tunneling. In these challenging environments, Clifton pumps have excelled. Their versatility, maneuverability, and rugged construction have made them indispensable in various applications.


The compact design of this portable dewatering pump is slim, lightweight, and features the ACrS technology. This makes them reliable and cost-effective. The ACrS technology makes the pump more reliable by ensuring that the pump will start up quickly and easily. The technology also makes the pump more cost-effective and energy efficient.

[VISIT SITE NOW >>](#)



**VISIT SITE NOW >>**

Product Code	Clifton 8220
Discharge Outlet	8 in (200 mm)
Shaft Speed	1750 RPM
Rated Output	30 HP (22 kW)
Rated Head	59 ft (18 m)
Rated Flow	1004 GPM (63.3 L/s)
Max Head	79 ft (24 m)
Max Flow	1664 GPM (105 L/s)
Solid Passage	1 in (35 mm)
Diameter	Ø23 in (592 mm)
Height	46 in (1172 mm)
Weight	772 lbs (350 kg)

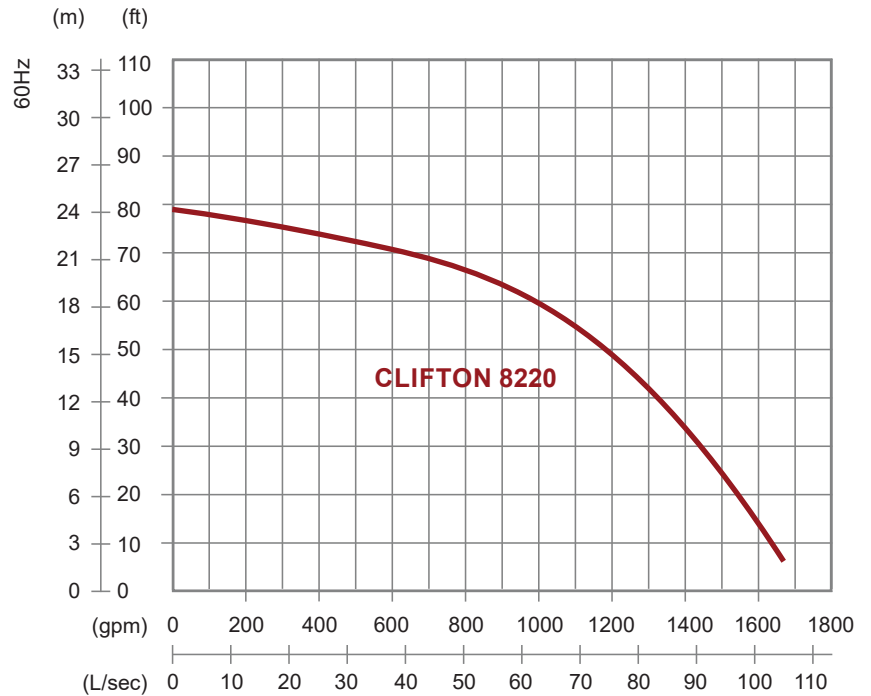

## SPECIFICATION

Product Code	Specification
Type	Electric Submersible Pumps
Phase	3-Phase
Classification	IP 68
Motor	Induction Motor
- Type	2 Pole
- Poles	Class F
- Insulation	Circle Thermal Protector
- Protector	D.O.L.
- Start Method	
Lubricant	Food Grade (ISO VG32)
Shaft Seal	Double Mechanical Seal
- Type	Silicon Carbide vs Ceramic / Carbon
- Desc.	
Impeller Type	Opened

Product Code	Specification
Bearing	C3 Shielded Ball Bearings
Cable	PVC (CSA Certified) / H07BQ-F
- Type	33 ft (10 m) or longer upon request
- Length	
Materials	Gray Iron
- Pump Casing	Chromium Iron
- Impeller	Stainless Steel
- Motor Frame	Stainless Steel
- Motor Shaft	Stainless Steel
- Strainer	Stainless Steel
Max. Liquid Temp.	104 °F (40 °C)
Max. Sub. Depth	66 ft (20 m)
pH Range	pH 5 - pH 8

**VISIT SITE NOW >>**



[VISIT SITE NOW >>](#)

## ELECTRIC SUBMERSIBLE PUMPS

With a compact, slim design and the patented ACrS technology, these wear-resistant, portable dewatering pumps provide reliable and economical solutions.

### Waterlight Cable Entry

An anti-wicking block is used to prevent water from entering the cable. Each conductor is then stripped and sealed in epoxy. This block stops moisture from reaching the motor chamber when the cable's end is damaged or submerged.

### Multi-Direction Discharge Coupling

The discharge can be switched between horizontal and vertical directions. A vertical discharge connection comes standard on pumps with 7.5 HP or more.

### Motor Protector

The motor incorporates a circle thermal protector, which protects against overheating and dry-run.

### Top Discharge and Double Housing Design

Designed to construct a water jacket that provides a maximum motor cooling effect for continuous operation at low water levels, this feature forms the cylindrical and slim shape of the pump. It enables the pump to be installed in confined spaces.

### Submersible Motor

The air-filled motor, housed in a watertight casing, conforms to Class F insulation.

### C3 Ball Bearings and Hardened SS Shaft

High-quality C3 ball bearings and the well-balanced, hardened stainless steel shaft enhance stability during continuous pumping operations.

### Double Mechanical Seals

Located in the oil chamber, the device is made of quality materials with highly wear-resistant silicon carbide on the lower side, providing extra protection against leakage and dry-run.

### Extra Protection for Mechanical Seals and Shaft

Lip seals and shaft sleeves are utilized for additional protection against wear.

### High Chrome Iron Impeller

Clifton's patent formula, ACrS Tech, is applied to all high chrome iron impellers. This technology increases wear resistance to particle abrasion.

[VISIT SITE NOW >>](#)